



Fire Safety & Clean Room Door Hardware

Pharma Lab Hardware

Glass Fitting S.S Hardware

Elevator Handrail

OEM & ODM service provider

AMBICA INDUSTRIES

MFG. & EXPORTER OF ARCHITECTURAL PRODUCTS



**We are invite you for OEM & ODM
service in your brand.**

INDEX

D Type Pull Handle	5
H Type Pull Handle	8
Push Pull Handle & Grab Rail	9
Mortice Handle	10
Concealed Handle	11
Mortice Locks	12
Shaft Locks	13
Cylinder Locks	14
Key Hole (ESCUTCHEON)	15
Kick & Push Plate	16
Door Closer	17
Flush Tower Bolt & Door Stop	20
Door Viewer & Door Drop Seal	21
Soft Close & Butt Hinge	24
Lock, Slide, Knob Drawer	25
Elevator Handrail Profiles	26

ABOUT US


"E~shine" is in Ahmedabad, Gujarat, India serving clients all over the world. We are providing quality hardware for all the applications Including glass assembled products which suits all the architecture products. E.g., office, Home, retail outlet, malls, Hospital and All the industries and many more. We have achieved many milestones by providing better Quality with timely service to Well-known and reputed customers. We are manufacturer and supplier of Glass fitting items like Spider fitting, patch fitting, Shower Fitting, door fitting, Pull Handle, Thumb Knows, Mortise handle etc. We are also a manufacturer and exporter of All kinds of SS Glass Door Handles, SS Railing, Stainless Steel Railing Accessories, sofa legs and different kinds of standoff fittings. All the products are available in different sizes that suit Client and end user's needs. Our Products are well Inspect and Assured by the Qualified Inspector prior to shipment. Our Products are manufactured and compliance with the international (CE, EN1935, Fire Rated and Many more) standard. We are also serving our international client duly Third-party Inspection as well. We are also serving our international client duly Third-party Inspection as well. We are serving our clients in the Middle East, Singapore, Africa, USA, Canada, Australia, UK, and many other countries.

We are committed to provide our clients with the best-of-breed, cost effective, excellent quality, innovative design, and superior services. At Ambica Industries, we believe the only way to achieve our objective is to ensure the success of our clients by exceeding our customer expectations.

We are happy to serve our customer with the loyalty, honesty, and Transparency with better engineering solution.




D Handle




H Handle




Bearing Hinge



Sign Plate




Mortise Dead Lock




Mortise Sash Lock



Door Closer



Concealed Tower Bolt




Lever Handle



Flush Handle

D PULL HANDLE

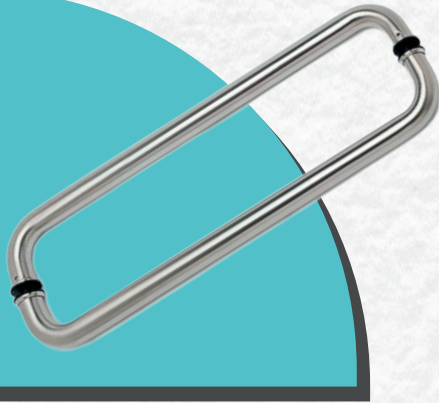


Handle plays an important role in the performance of doors. It has always been a challenge to identify the right handle based on type of building, application and user interface. As E~shine, we have got the vast experience. We believe and offer some of the best and most suitable handle meeting the performance criteria of various types of doors.

Sr. No.	Drawing	Components
1		SS 304 Tubler 1.5mm thickness
2		SS 304 Threaded Bush
3		SS 304 Pin Bush
4		SS 304 Embossed Washer (1mm thickness)
5		PVC Washer
6		SS 304 Stud Pin
7		SS 304 Grub Screw

- We always use stainless steel 304/316 Grade and also Corresponds to the following standard, designation and specification.

Euronorm	1.4301
UNS	S30400
BS	304S16
EN	58E

- Our handle has excellent corrosion resistance in a wide variety of environment and when in contact with different corrosive media.
- Our handle has good heat resistance to oxidation I continues service up to 870 degree celcius.
- We Provide all types of Material Test Certificate (MTC) of pull Handle.

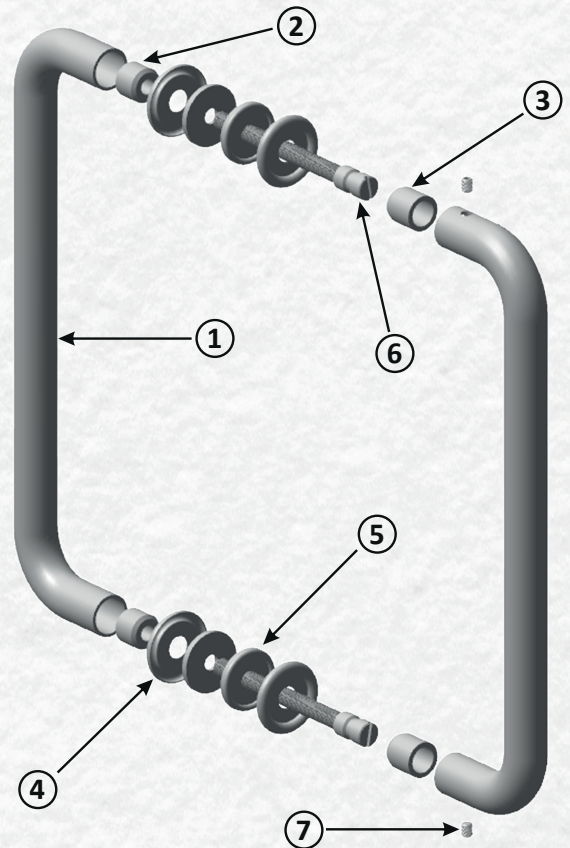


(MTC ILLUSTRATION)

"D" HANDLE MATERIAL TEST CERTIFICATE				CHEMICAL PROPERTIES			MECHANICAL PROPERTIES			
PRODUCT PARTS	SIZE	MTC NO/DATE	HEAT NUMBER	C%	CR%	NI%	TENSILE STRENGTH MPA	EIONGATIO N%	BEND TEST	HARDNESS V.P.N
S.S. TUBE	DIA 19MM × 1.5MM THICKNESS	18/20-08-2023	21SGF42-8G	0.06	18.02	8.01	540	54	OKAY	170.18
S.S. BUSH	DIA 16MM	18/20-08-2023	22SF345	0.06	18.3	8.02	591	52	591	195
S.S. STUD PIN	8MM × 90MM	18/20-08-2023		0.07	18	8.01				
S.S. WASHER	DIA 30MM × 1MM	18/20-08-2023	567TE68	0.06	18.1	8.02	572	54	OKAY	170.18



Our D Handles are easy-to-fit and durable. They are made from premium quality **Grade 304 & Grade 316 Stainless Steel**, with SS inserts, which means they won't rust. The D Handles are perfect for commercial uses.

The different size and specification as below table:

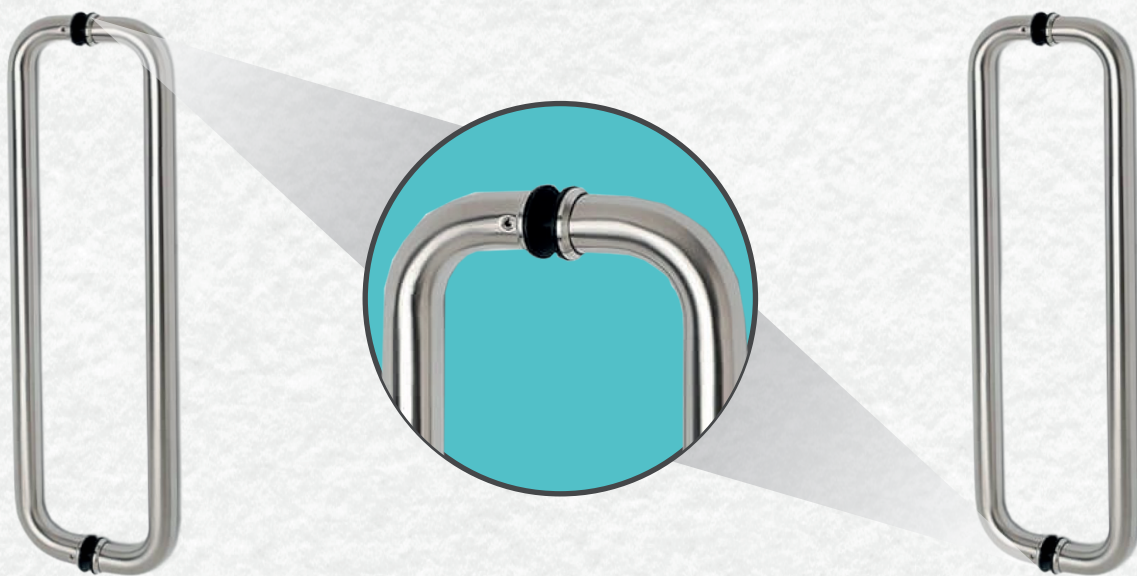


"D" TYPE PULL HANDLE				
SR. NO.	DIAMETER	HOLE CENTER	TUBULAR THICKNESS	MATERIAL GRADE
1	19 MM	150 MM	1.5 MM	S.S 304 , S.S 316
2	19 MM	200 MM	1.5 MM	S.S 304 , S.S 316
3	19 MM	250 MM	1.5 MM	S.S 304 , S.S 316
4	19 MM	300 MM	1.5 MM	S.S 304 , S.S 316
5	22 MM	200 MM	1.5 MM	S.S 304 , S.S 316
6	22 MM	250 MM	1.5 MM	S.S 304 , S.S 316
7	22 MM	300 MM	1.5 MM	S.S 304 , S.S 316
8	25 MM	300 MM	1.5 MM	S.S 304 , S.S 316
9	25 MM	450 MM	1.5 MM	S.S 304 , S.S 316
10	25 MM	600 MM	1.5 MM	S.S 304 , S.S 316
11	25 MM	900 MM	1.5 MM	S.S 304 , S.S 316
12	32 MM	450 MM	1.5 MM	S.S 304 , S.S 316
13	32 MM	600 MM	1.5 MM	S.S 304 , S.S 316
14	32 MM	900 MM	1.5 MM	S.S 304 , S.S 316
15	32 MM	1200 MM	1.5 MM	S.S 304 , S.S 316
WE ALSO PROVIDE AS PER CUSTOMIZED REQUIREMENT				

- We also provide customization as per requirements.
- We also provide **OEM & ODM** in your valuable brand.

SINGLE D PULL HANDLE

Our Single D Handle combines ease of installation with lasting durability. Crafted from high-quality **Grade 304 and Grade 316 Stainless Steel**, featuring SS inserts to prevent rusting, ensuring longevity and reliability



DOUBLE D PULL HANDLE


AISI Corrosion Resistance **S.S. 304 & 316 Grade Material** BSEN Certified & Fire Rated Product

SR. NO.	DIAMETER	HOLE CENTER	TUBULAR THICKNESS
1	19 MM	150 MM	1.5 MM
2	19 MM	200 MM	1.5 MM
3	19 MM	250 MM	1.5 MM
4	19 MM	300 MM	1.5 MM
5	22 MM	200 MM	1.5 MM
6	22 MM	250 MM	1.5 MM
7	22 MM	300 MM	1.5 MM
8	25 MM	300 MM	1.5 MM
9	25 MM	450 MM	1.5 MM
10	25 MM	600 MM	1.5 MM
11	25 MM	900 MM	1.5 MM
12	32 MM	450 MM	1.5 MM
13	32 MM	600 MM	1.5 MM
14	32 MM	900 MM	1.5 MM
15	32 MM	1200 MM	1.5 MM

WE ALSO PROVIDE AS PER CUSTOMIZED REQUIREMENT

H PULL HANDLE

AISI Corrosion Resistance **S.S. 304 & 316 Grade**
Material BSEN Certified & Fire Rated Product

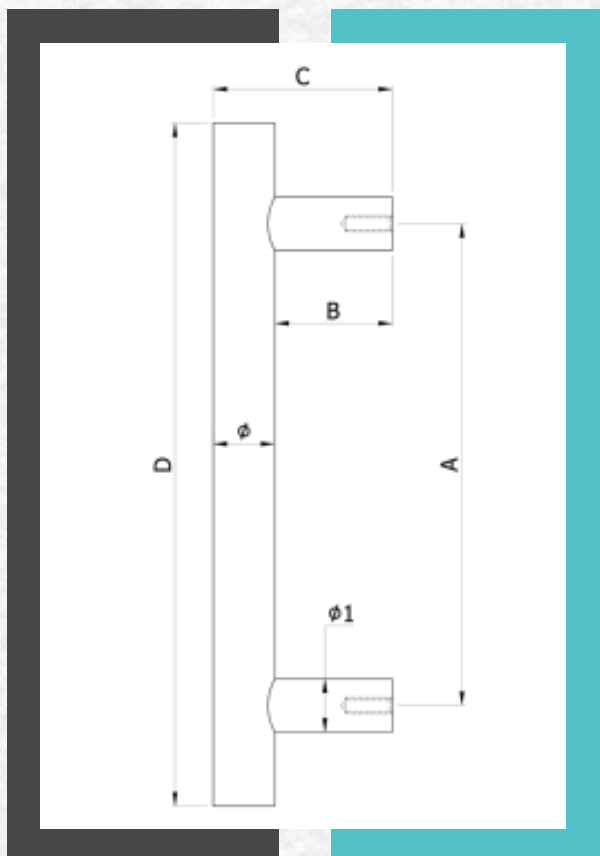

SR. NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
DIAMETER	19 MM	19 MM	19 MM	19 MM	22 MM	22 MM	22 MM	25 MM	25 MM	25 MM	25 MM	32 MM	32 MM	32 MM	32 MM
HOLE CENTER	150 MM	200 MM	250 MM	300 MM	200 MM	250 MM	300 MM	300 MM	450 MM	600 MM	900 MM	450 MM	600 MM	900 MM	1200 MM
TUBULAR THICKNESS	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM
WE ALSO PROVIDE AS PER CUSTOMIZED REQUIREMENT															



PUSH PULL HANDLE

Push & Pull Handle **Plate 304 Stainless Steel**, good water & corrosion and durable.

Suitable for all kinds of access doors, all kinds of push-pull wooden doors, all kinds of commodity store doors.

- **Base thickness:** 1.5mm
- **Base: dimension:** 100mm* 300mm
- **Handle diameter:** 19mm & 22mm
- **Handle Length:** 200mm

304 Stainless Steel Screws are included to mount on doors or gates

GRAB RAIL

'E~Shine' Brand **S.S. 304 & 316 Grade**

Grab Rail

[Fire Rated – BSEN 1634 :1: 2000 Certified]

SR. NO.	DIAMETER	HOLE CENTER	TUBULAR THICKNESS
1	19 MM	150 MM	1.5 MM
2	19 MM	200 MM	1.5 MM
3	19 MM	250 MM	1.5 MM
4	19 MM	300 MM	1.5 MM
5	22 MM	200 MM	1.5 MM
6	22 MM	250 MM	1.5 MM
7	22 MM	300 MM	1.5 MM
8	25 MM	300 MM	1.5 MM
9	25 MM	450 MM	1.5 MM
10	25 MM	600 MM	1.5 MM
11	25 MM	900 MM	1.5 MM
12	32 MM	450 MM	1.5 MM
13	32 MM	600 MM	1.5 MM
14	32 MM	900 MM	1.5 MM
15	32 MM	1200 MM	1.5 MM

WE ALSO PROVIDE AS PER CUSTOMIZED REQUIREMENT




Grade Material With Euro Profile
Escutcheons & High Tensiled Fixing
Accessories


Dia Ø 19/22mm Hollow Pipe of 1.5mm Thickness



Dia Ø 19/22mm Hollow Pipe of 1.5mm Thickness
Best For Wooden Door



SHAFT LOCK

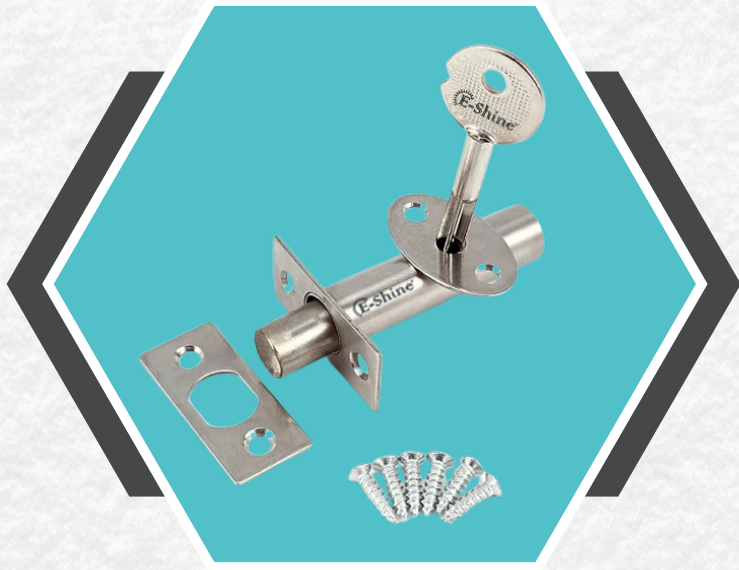

(A)

STAR KEY SHAFT LOCK

Fire Door Stainless Steel Hidden Tubewell Key Mortise Lock with Long Core. Shaft key Door Lock, come with a key, tow plates and several screws. Steel tube wells lock manager locks the fire door framed door hidden key lock mortise lock Cross.

Applies to:

- Fire doors
- Framed doors
- Invisible doors

BRASS DEAD BOLT SHAFT LOCK

Fire Door shaft Mortise Lock with Long Core. Shaft key Door Lock, come with a key, tow plates and several screws. Shaft lock locks the fire door framed door hidden key lock mortise lock Cross.

Applies to:

- Fire doors
- Framed doors
- Invisible doors




(B)

OVAL CONCEALED HANDLE

Manufactured from **Stainless Steel 304G and 316G** with Highly Matt Finish


- For use with sliding doors or doors fitted with roller catches
- Outside Measurement 120 x 40mm
- Recess depth 10mm



RECTANGULAR CONCEALED HANDLE

Manufactured from **Stainless Steel 304G and 316G** with Highly Matt Finish.

- For use with sliding doors or doors fitted with roller catches
- Outside Measurement 100 x 50mm
- Recess depth 10mm




MORTISE LOCKS

MORTISE DEAD LOCK

Features Include:

- Fixed forend
- 65mm & 75mm backsets
- High quality smooth operation
- Two stock finishes available
- 11 optional colours & accessory kits
- Complete with fixings

Stainless steel main and strike plate. Internally convertible latch for left/right door use. Highly tested mechanism for longer life

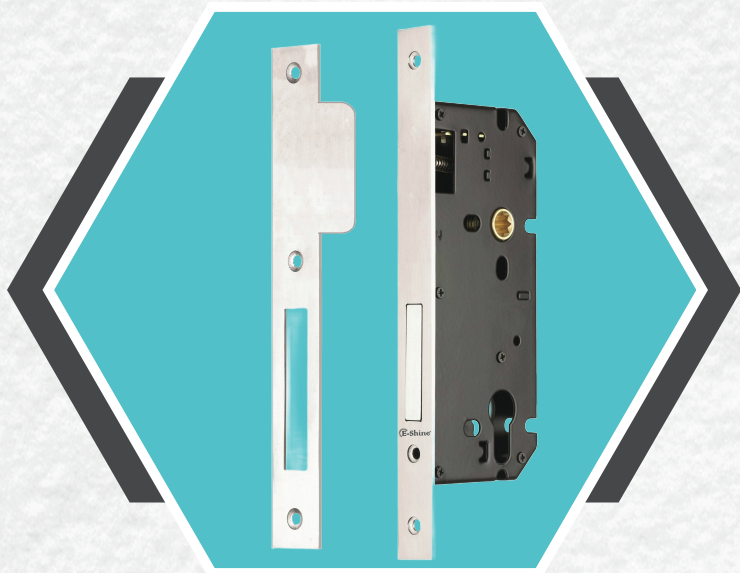

DEAD LOCK


- Size : 9"
- Back Set : 50 x 85

Available With Back To Back Fixing Features

MORTISE SASH LOCK

- Size : 9"
- Back Set : 50 x 85

Available With Back To Back Fixing Features

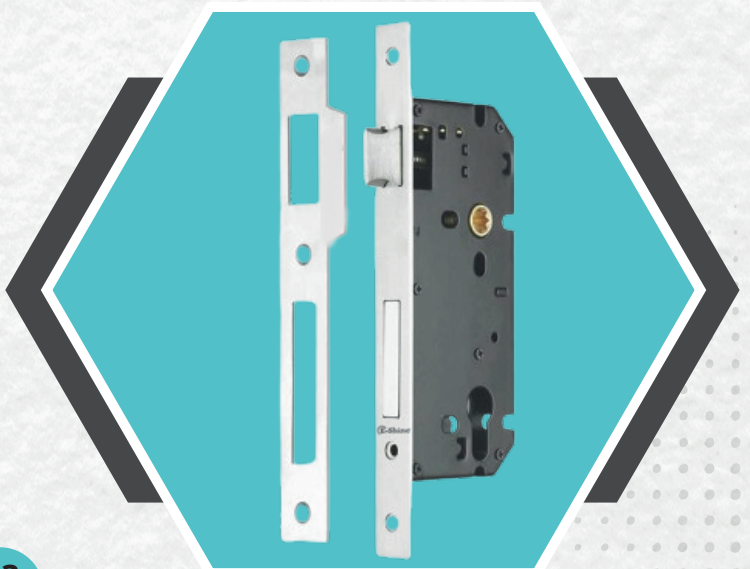

CYLINDER LOCKS

KONB AND KEY CYLINDER

Features Include:

E-Shine cylinder is the best choice for an inexpensive home security installation and is available in brass, nickel, black, polished chrome and flint finishes.

- Secured by Design approved
- Supplied with 3 keys
- Sacrificial cut, anti-bump, anti-drill and anti-pick




BOTH SIDE KEY CYLINDER

70mm Mortice Pin Cylinder
Both Side Key
[Fire Rated – BSEN 1634 : 1 : 2000 Certified]






KEY HOLE (ESCUTCHEON)

'E~Shine' Brand S.S. 316 Grade
Europrofile




DOOR HINGE 2 BALL BEARING

Door Hinge With 2 Ball Bearing
(L x W x T) mm
(101.6 x 76 x 3)

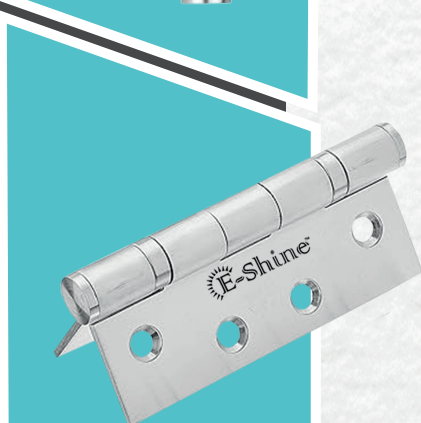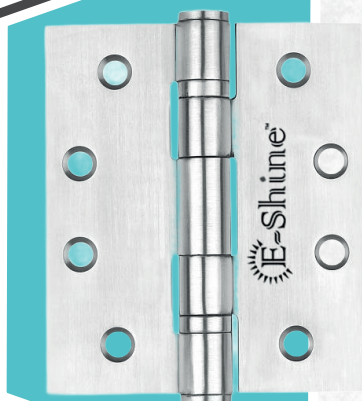

- Stainless steel fireproof steel Bearing hinges, Suitable for 60 and 90 & 120 minutes fireproof doors.
- CE approved and BS EN 1935 hinges, which have a class 13 rating for smoke and fire doors.
- Ideal for commercial purposes such as fire doors and heavy standard doors.
- Suitable for door thicknesses up to 120 kg (depending on From the door closer selection and its weight).
- Tested up to 200,000 cycles Made of high quality stainless steel with various metal colors 10g x 1.1/4" thread, hardened double threaded wood screws.
- We recommend to open all 3 joints per door
Dimensions: Height: 102mm Blade Thickness: 3mm Blade Width: 3mm Blade Width: 76mm

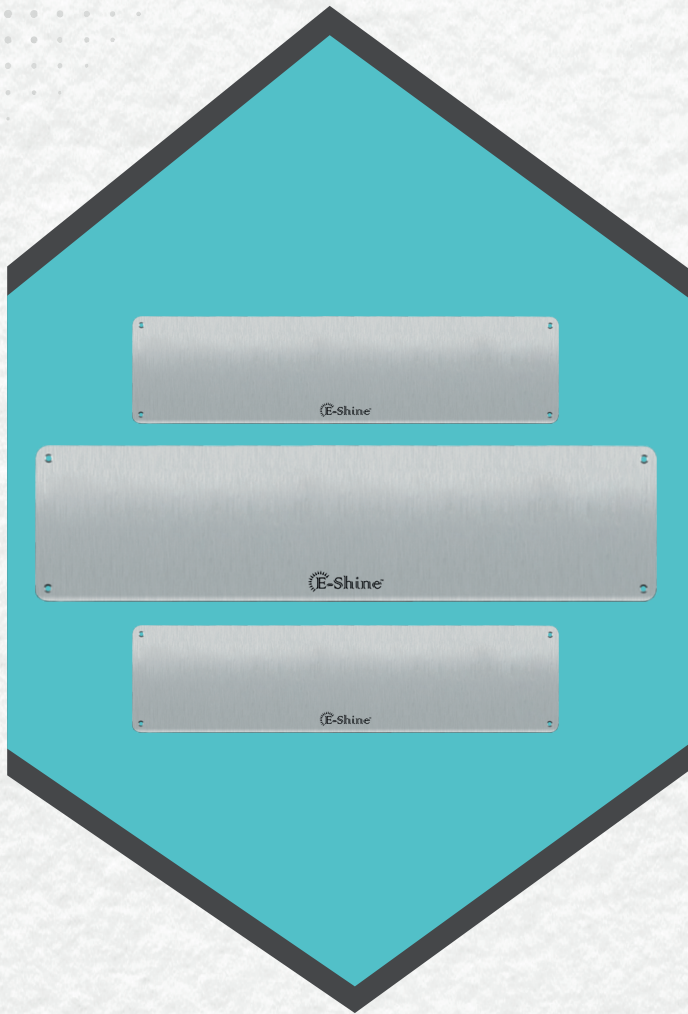


KICK PLATE

Stainless Steel Kick plates / Mop plates / Stretcher Plates / Push Plates. Available in different grades & gauges.

E~Shine Brand Door Kick Plate
Size: 800x200x1.5mm
& As Per Requirement

PUSH PLATE

- Extensively Spaced That Enables A Clear View Of The Sign From A Distance
- Black Color Makes It Easily Visible
- Applicable For Wooden & Metal Doors

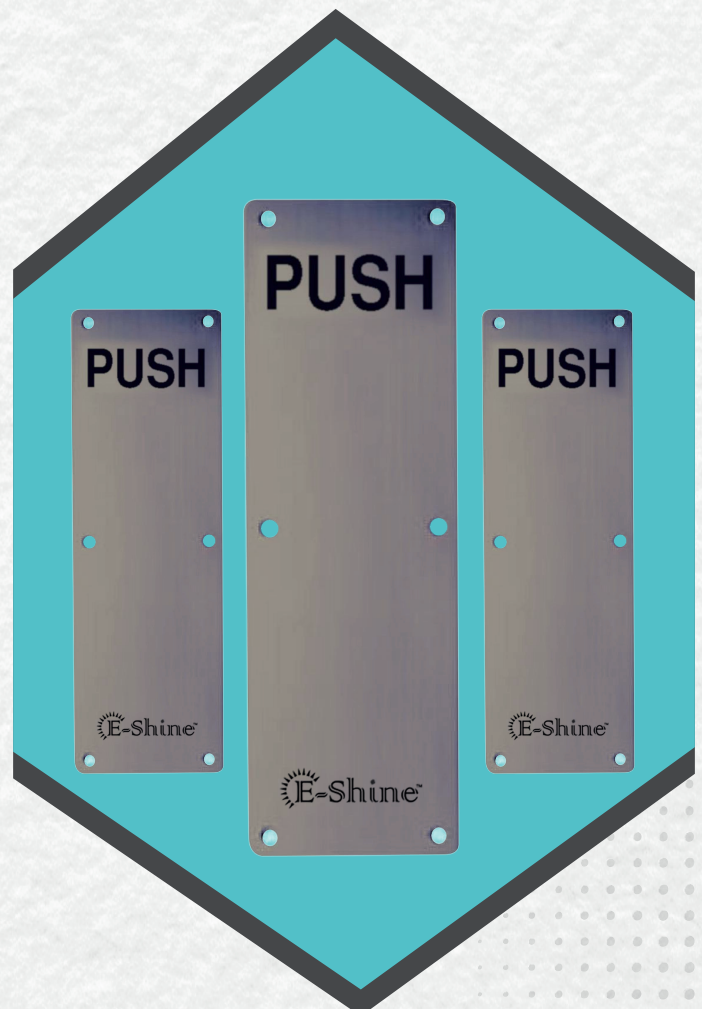

DOOR CLOSER



EDC - ECO

Weight Cap.	Upto 60 kg.
Closing Force	EN 2/3
Door Size	850mm to 950mm
1 Cartoon	25 Nos.




EDC - 100 REGULAR

Weight Cap.	Upto 85 kg.
Closing Force	EN 2/4
Door Size	850mm to 1100mm
1 Cartoon	25 Nos.



EDC-200 UNIVERSAL

Weight Cap.	Upto 60 kg.
Closing Force	EN 2/3
Door Size	850mm to 1250mm
1 Cartoon	25 Nos.

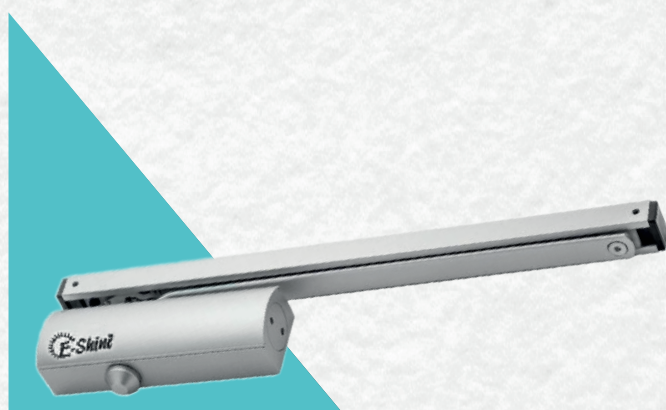

EDC-200-90 UNIVERSAL HOLD OPEN


Weight Cap.	Upto 100 kg.
Closing Force	EN 2/5
Door Size	850mm to 1250mm
1 Cartoon	20 Nos.





EDC-300 PALMET REGULAR

Weight Cap.	Upto 120 kg.
Closing Force	EN 2/6
Door Size	850mm to 1400mm
1 Cartoon	25 Nos.

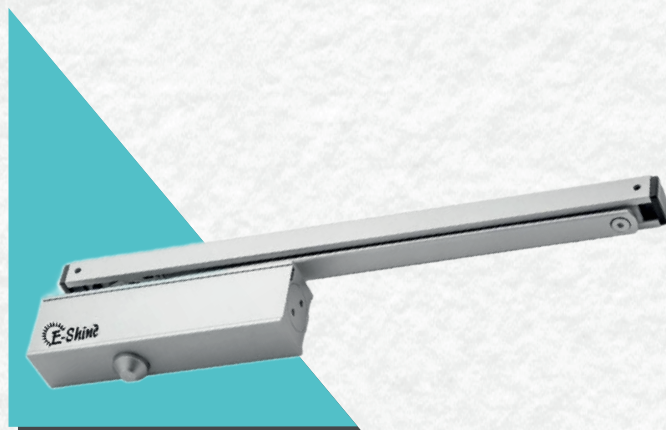


EDC-300-90 PALMET HOLD OPEN

Weight Cap.	Upto 120 kg.
Closing Force	EN 2/6
Door Size	850mm to 1400mm
1 Cartoon	20 Nos.



EDC-600 ZOP HEAVY DUTY

Weight Cap.	Upto 120 kg.
Closing Force	EN 2/6
Door Size	850mm to 1400mm
1 Cartoon	25 Nos.

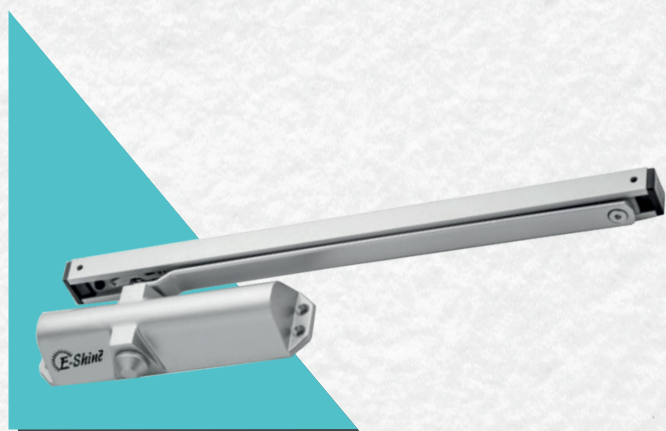

EDC-600-90 ZOP HOLD OPEN


Weight Cap.	Upto 120 kg.
Closing Force	EN 2/2/6
Door Size	850mm to 1400mm
1 Cartoon	20 Nos.






EDC-700 PALMET LINEATD

Weight Cap.	Upto 100 kg.
Closing Force	EN 2/5
Door Size	850mm to 1250mm
1 Cartoon	25 Nos.

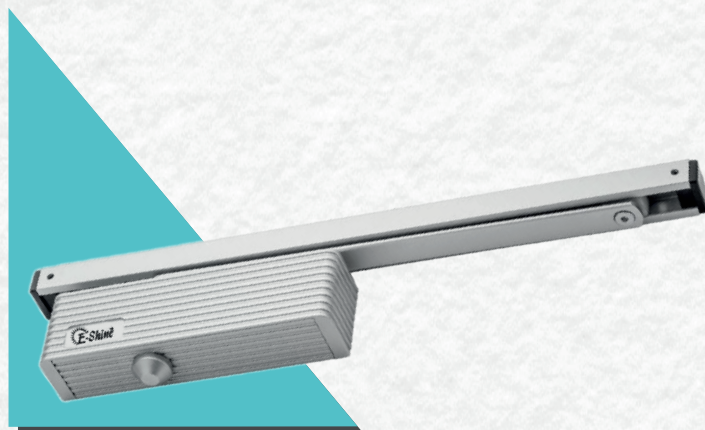


EDC-700-90 PALMET LINEATD HOLD OPEN

Weight Cap.	Upto 100 kg.
Closing Force	EN 2/5
Door Size	850mm to 1250mm
1 Cartoon	20 Nos.

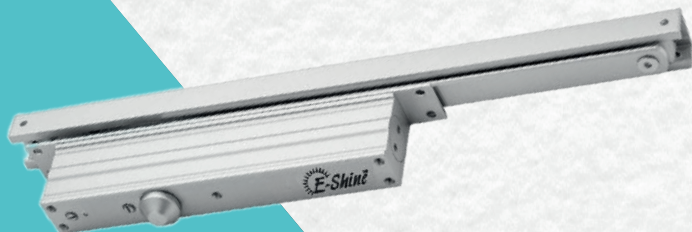

EDC-500 CONCEAL


Weight Cap.	Upto 100 kg.
Closing Force	EN 2/4
Door Size	850mm to 1100mm
1 Cartoon	20 Nos.

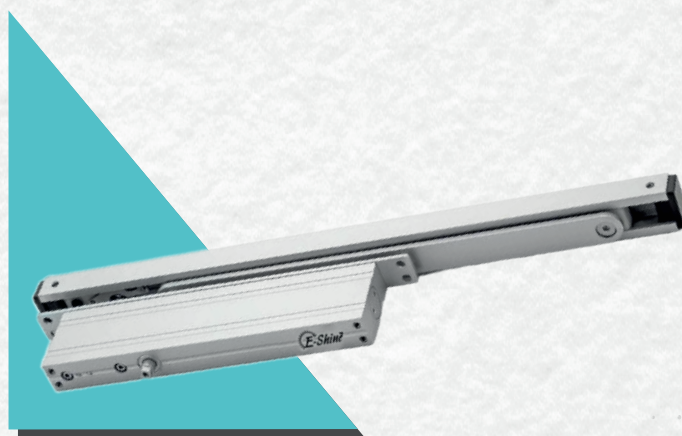

EDC-800 SLIM CONCEAL

Weight Cap.	Upto 40 kg.
Closing Force	EN 2
Door Size	850mm
1 Cartoon	20 Nos.



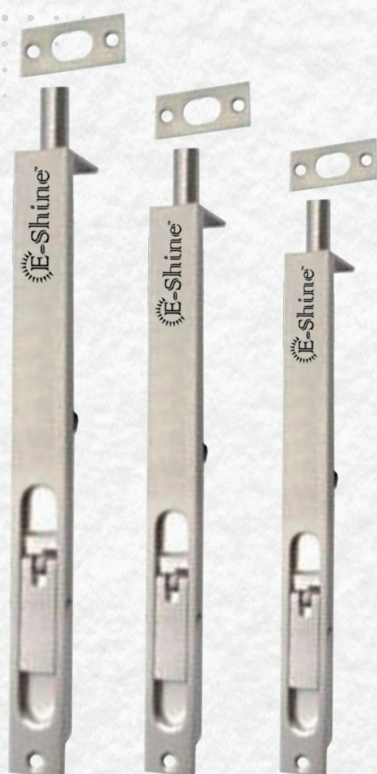

SS FLUSH TOWER BOLT



SS304 flush bolts are extruded from solid Steel, completed with Silver Satin for long and rust free life. These bolts are ideal for securing the inactive leaf on a set of double doors. Flush, compact latch adds extra security to your door. They can be used both at the top or bottom of the door. These bolts adds to the look of the door since they can be fitted flush to the face of the door or recessed into the door edge. 100% Solid steel ensures durability. Includes finish-matching strike and screws for installation. The extensive range provides various finishes and sizes from 100 mm to 600 mm, sufficient to cover most applications.

DOOR STOP





HALF MOON

- Corrosion Resistant AISI S.S.316 Grade

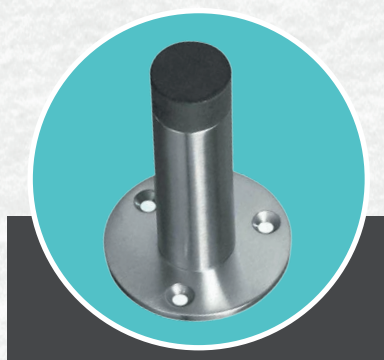


WALL MOUNTED

- Corrosion Resistant AISI S.S.316 Grade
- Available in 75mm and 100mm Size

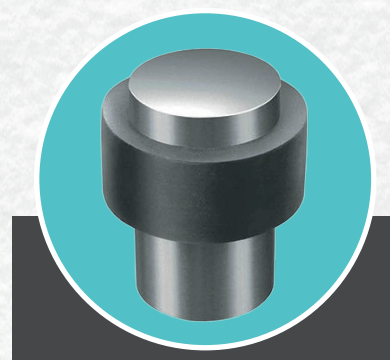

FLOOR FLAT

- Corrosion Resistant AISI S.S.316 Grade






DOOR VIEWER

Ultra-clear view with wide angle for all round visibility

- Use best in class Ultra Clear lens so Outsider cannot hide anywhere
- Unique design, Superior and SS Finish
- The Viewing angle is crystal clear and it has 180° degree great visibility
- Easy to install over a wide range of door thickness

AUTOMATIC DOOR DROP SEAL

Size	300mm to 2500mm
Material	High quality Aluminium Extrusion
Min/Max Gap	3mm / 14mm
Seal	PVC(Soft Grey), EPDM, Silicon

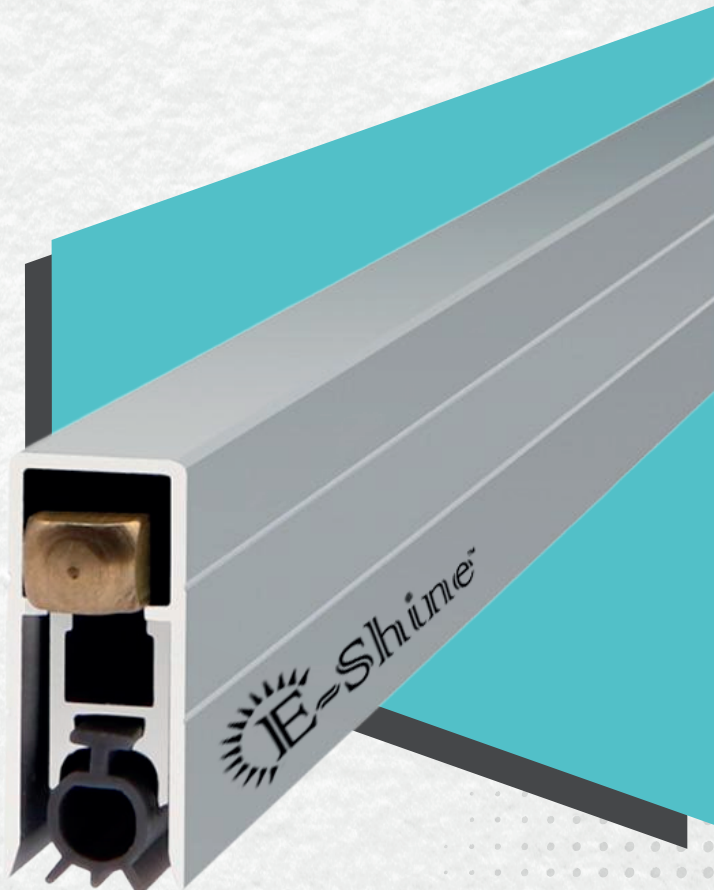



E~SHINE PRODUCTS ARE IDEAL FOR **PHARMA / LAB FURNITURE** DUE TO ITS HYGIENIC SAFETY FACTOR



Cabinet Handle



Concealed Handle



Soft Close Hinge



Butt Hinge





Drawer Lock



Drawer Slide



Knob Drawer

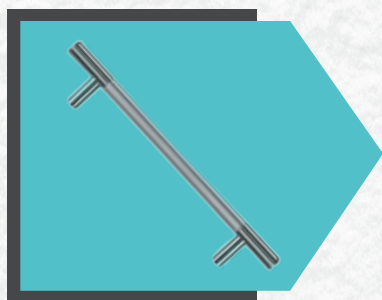


CABINET H HANDLE

- AISI Corrosion Resistance **S.S. 304G & 316G** Cabinet Handles
- Registered Design

A	B	C	D	E	F	G	H	I	
32 mm	64 mm	96 mm	128 mm	160 mm	192 mm	224 mm	288 mm	352 mm	1-8mm 2-10mm 3-12mm

Dim/Code	Ø	A	C	D	SIZE
CHH	10	64	32	113	B to I
CHH	12	96	36	156	C to I




CABINET D HANDLE

- AISI Corrosion Resistance **S.S. 304G & 316G** Cabinet Handles
- Registered Design



A	B	C	D	E	F	G	H	I	
32 mm	64 mm	96 mm	128 mm	160 mm	192 mm	224 mm	288 mm	352 mm	1-8mm 2-10mm 3-12mm

Dim/Code	Ø	A	C	D	SIZE
CHF	10	96	31	106	C to E
CHF	12	128	33	140	C to E





CONCEALED OVAL HANDLE

- Corrosion Resistant AISI **S.S. 304G & 316G**
- Concealed Handle- Oval 120 mm
- [Finish : Satin]

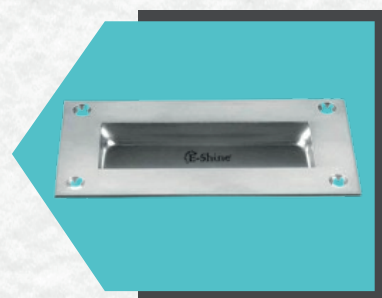


CONCEALED RECTANGULAR HANDLE

- Corrosion Resistant AISI **S.S. 304G & 316G**
- Concealed Handle-Rectangle 100 mm
- [Finish : Satin]

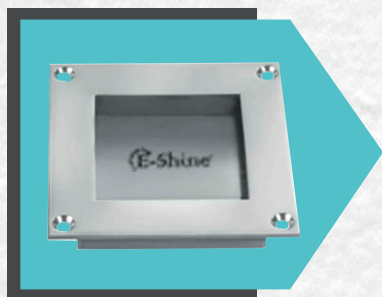

CONCEALED SQUARE HANDLE




- Corrosion Resistant AISI **S.S. 304G & 316G**
- Concealed Handle-Square 55 mm
- [Finish : Satin]



CONCEALED HANDLE ROUND

- Corrosion Resistant AISI **S.S. 304G & 316G**
- Concealed Handle-Round 70 mm
- [Finish : Satin]

SOFT CLOSE HINGE

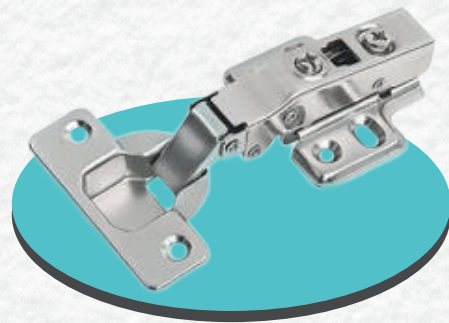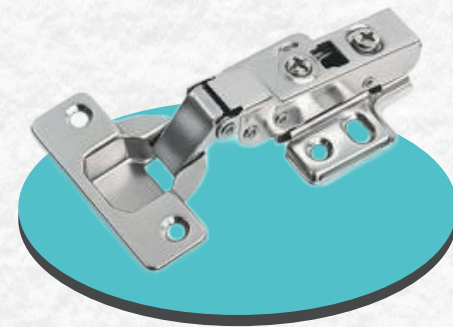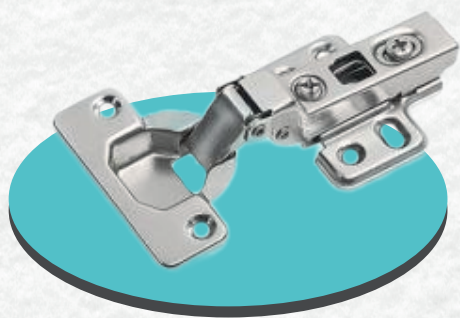

FULL OVERLAY HINGE




- Soft Closing Clip on Hinge
- Full Overlay
- [Finish: Satin]

HALF OVERLAY HINGE



- Soft Closing Clip on Hinge
- Half Overlay
- [Finish: Satin]

INSET HINGE

- Soft Closing Clip on Hinge
- Inset
- [Finish: Satin]



BUTT HINGE

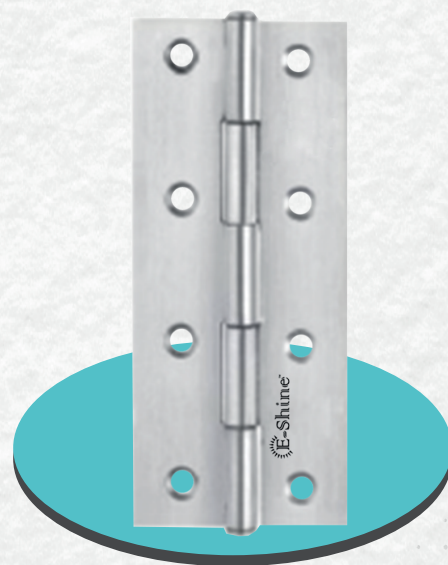
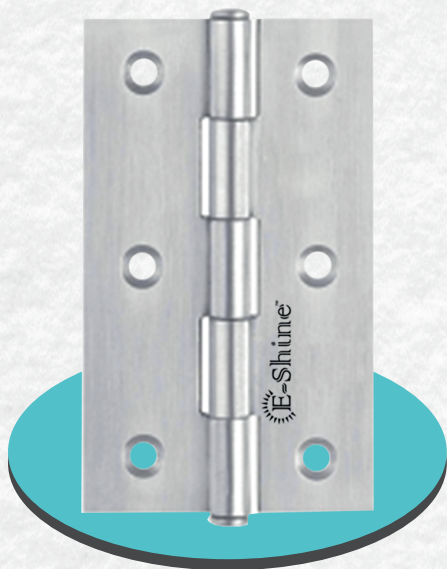


'E-Shine' Brand **S.S. 304G & 316G** Corrosion Resistant


Window Hinge Without Bearing (L x W x T)mm
(76 x 44 x 1.5) 2,00,000 Life Cycle Mechanically
Tested BSEN Certified

'E-Shine' Brand **S.S. 304G & 316G** Corrosion Resistant

Window Hinge Without Bearing (L x W x T)mm
(102 x 44 x 1.5) 2,00,000 Life Cycle Mechanically
Tested BSEN Certified





DRAWER LOCK



DRAWER LOCK SIMPLE KEY


- 22mm Drawer Lock
- Material : High Quality Zinc
- With Standard Keys

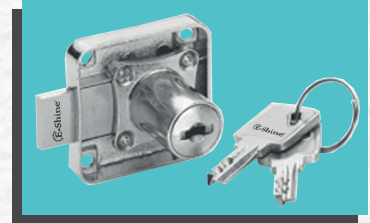

DRAWER LOCK ULTRA KEY

- 22mm Drawer Lock
- Material : High Quality Zinc
- With Computerized Dotted Keys

DRAWER SLIDE

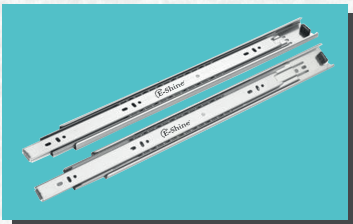

SILVER FINISH

- Width : 45mm
- Thickness : 1.2x1.2x1.5mm
- Corrosion Resistance Premium quality Zinc Coated Slides
- Heavy Duty Metal body & Precision Ball Bearings for higher durability
- In-house Tested Mechanism for Smooth, Silent and Longer working life cycle
- Available Sizes : 10,12,14,16,18,20,22,24 (Inches)
- Weight Capacity Upto 45 Kg



BLACK FINISH

- Width : 45mm
- Thickness : 1.2x1.2x1.5mm
- Corrosion Resistance Premium quality Zinc / Black Coated Slides
- Heavy Duty Metal body & Precision Ball Bearings for higher durability
- In-house Tested Mechanism for Smooth, Silent and Longer working life cycle
- Available Sizes : 10,12,14,16,18,20,22,24 (Inches)
- Weight Capacity Upto 45 Kg

KNOB FOR DRAWER



EKD - 1

- S.S. 304G & 316G Corrosion Resistant
- Drawer Knob



EKD - 2

- S.S. 304G & 316G Corrosion Resistant
- Drawer Knob



EKD - 3

- S.S. 304G & 316G Corrosion Resistant
- Drawer Knob



ELEVATOR HANDRAIL PROFILES




ROUND HANDRAIL

The Industry Standard. Available in 1.5" dia and 2.0" dia, E-shine round rails always compliment a Elevator interior. The length is available in 900 mm, 1000 mm, 1200 mm. We are also providing handrail as per customized size and requirement.



SOLID FLAT HANDRAIL

Eshine Solid Flat-Bar rails and bumpers provide long lasting protection and great looks. The Solid Flat-Bar Size is 50 mm x 12 mm. The Length is available in 900 mm, 1000mm, 1200 mm. We are also providing handrail as per customized size and requirement.

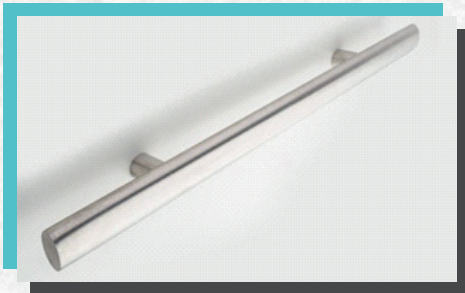

OVAL HANDRAIL

Our oval handrails can either be vertically or horizontally mounted and meets accessibility requirements. The Oval Bar Size is 50 mm x 20 mm. The Length is available in 900 mm, 1000 mm, 1200 mm. We are also providing handrails as per customized size and requirement.



CONTINUOUS HANDRAIL

Continuous handrails offer a seamless look to any elevator interior. We are also providing handrail as per customized size and requirement.



SQURE HANDRAIL

Square and rectangular profiles create sophisticated and modern expressions. 50 mm x 12 mm. The Length is available in 900 mm, 1000 mm, 1200 mm. We are also providing handrail as per customized size and requirement.



VAULT MOUNT HANDRAIL

Available in 1.5" dia round and all finishes, the Vault Mount series handrail gives any Elevator interior a lasting impression to anyone who rides in it. We are also providing handrail as per customized size and requirement.



CONTACT US



+91 98796 23432



info@eshinehardware.com



www.eshines.in



**Ambica Industries 143, Adarsh
industrial estate Rakhial 23, Ahmadabad**

